




the  
floor  
hub<sup>®</sup>

The Place for Commercial Carpet Tiles

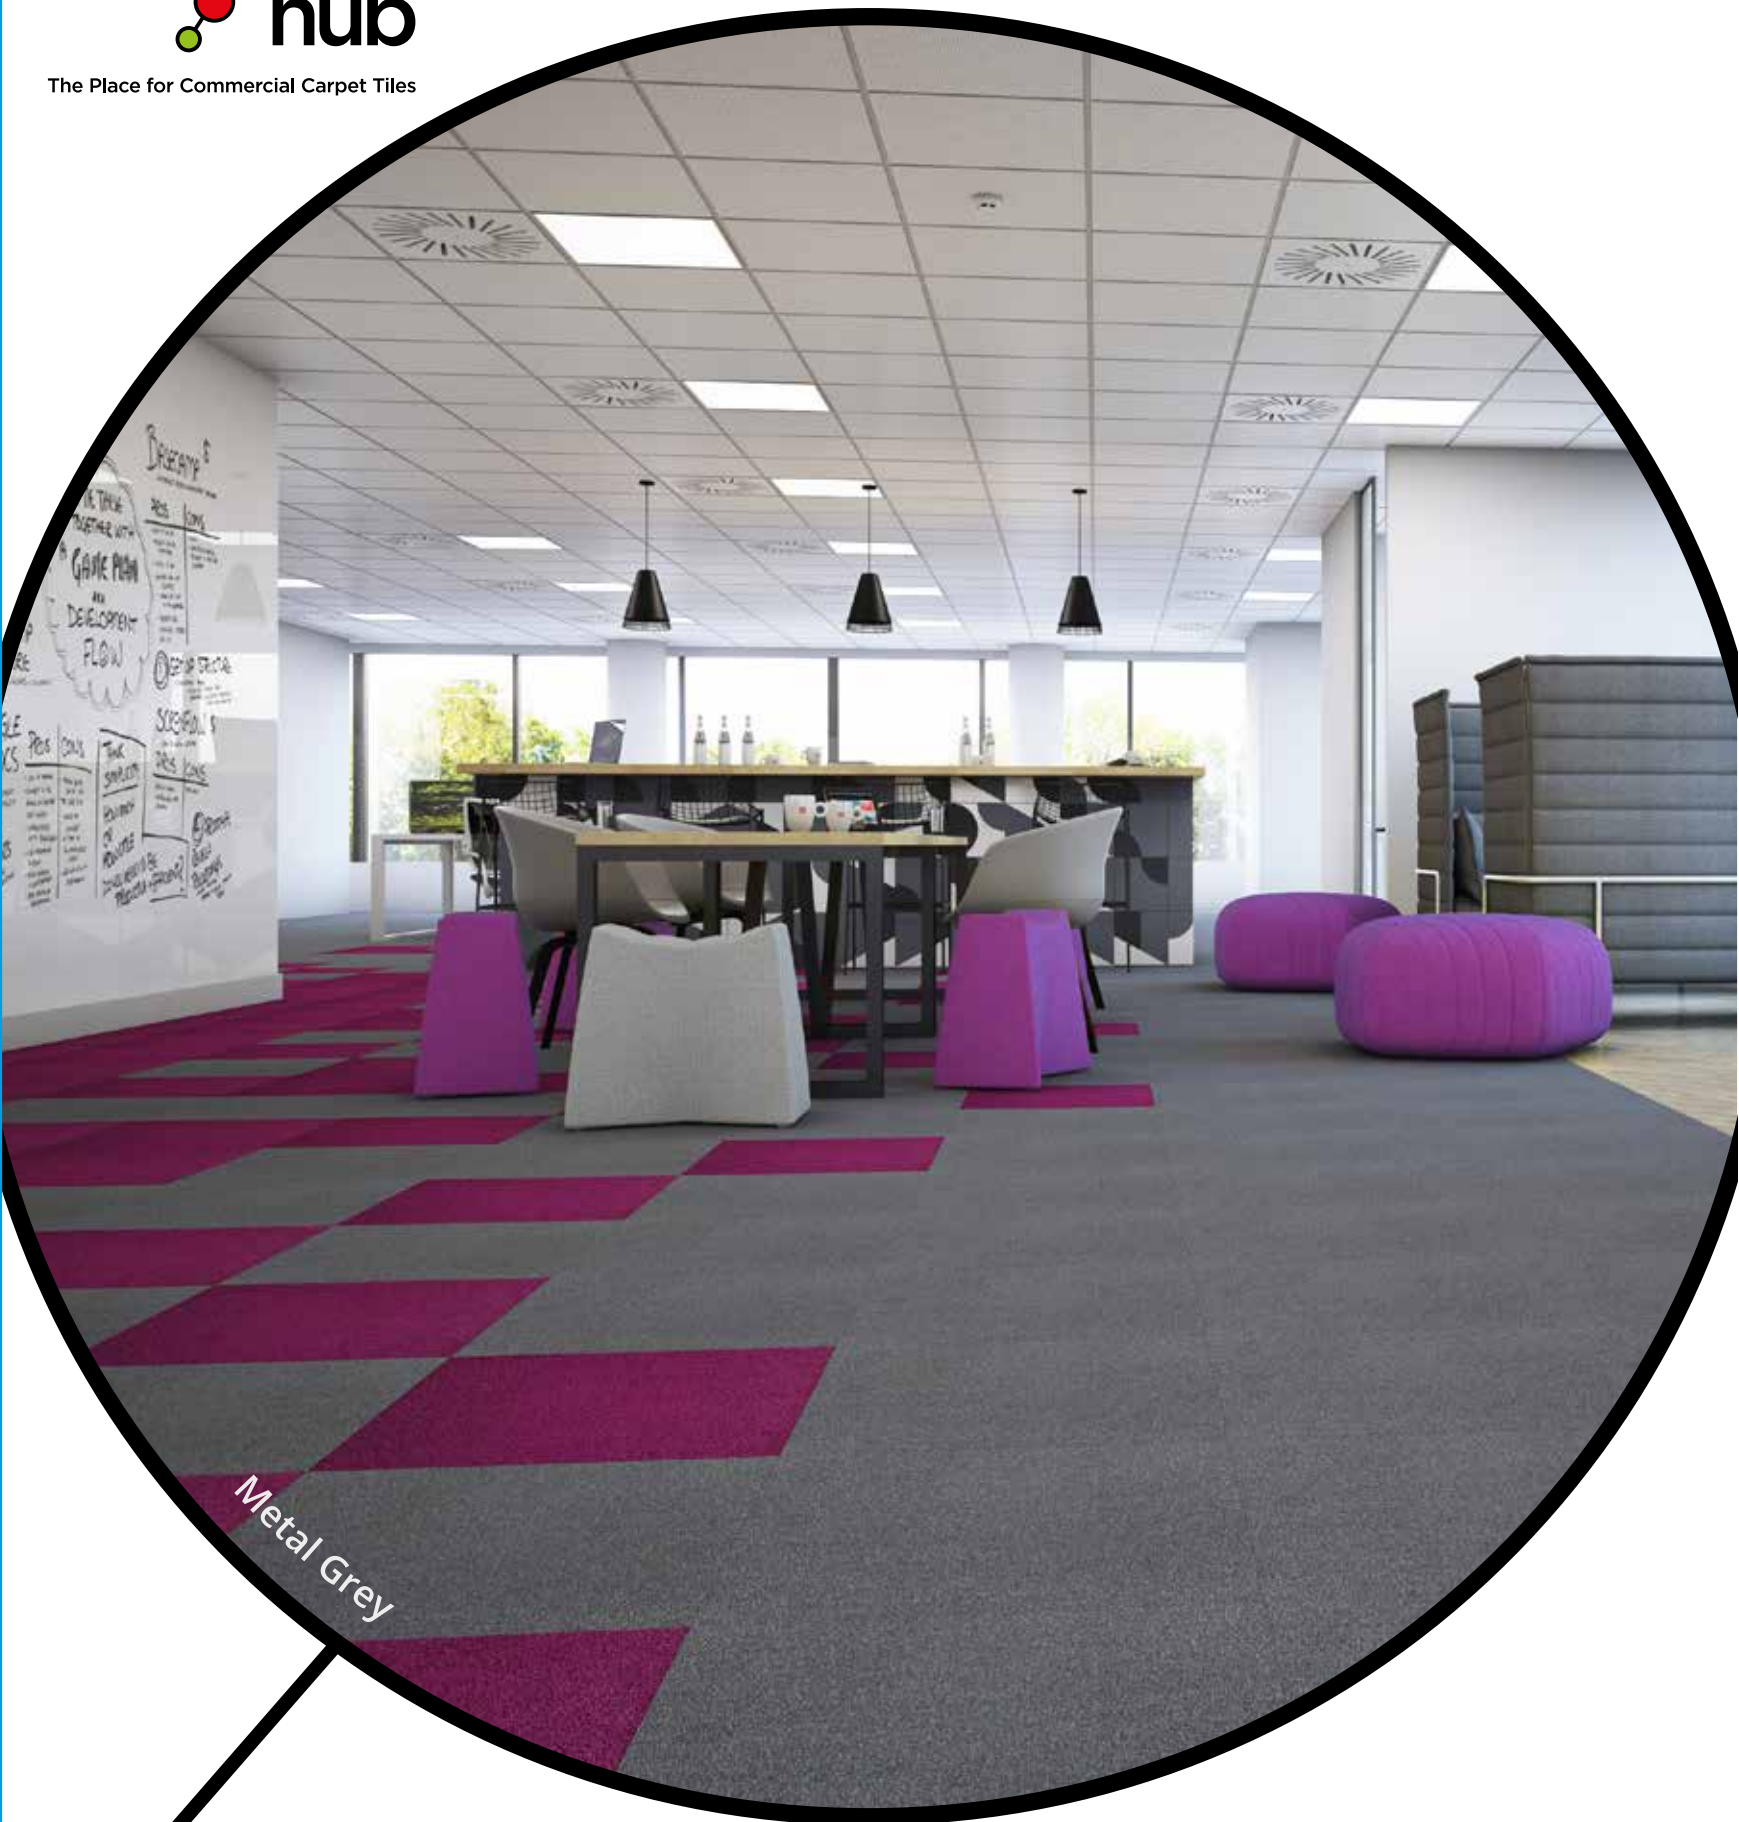

Metal Grey


# Prism

Vibrant cut pile carpet tile

# Prism



Moss

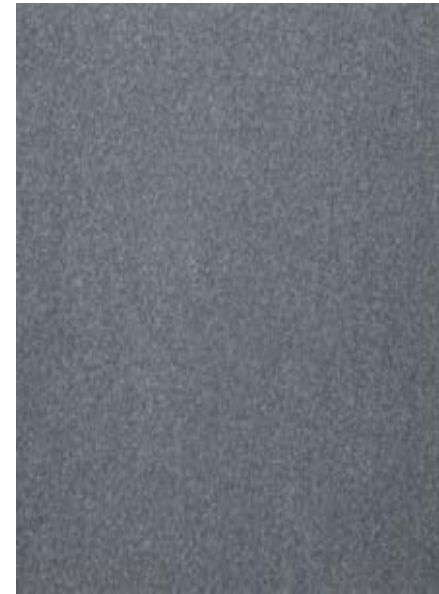

Blue Shadow



Blue Mist



Frost Green



Oxford Blue



Sea Navy



Forest Green



Raven



Lead




Puritan Beige



Grapefruit



5ad Pink Coral

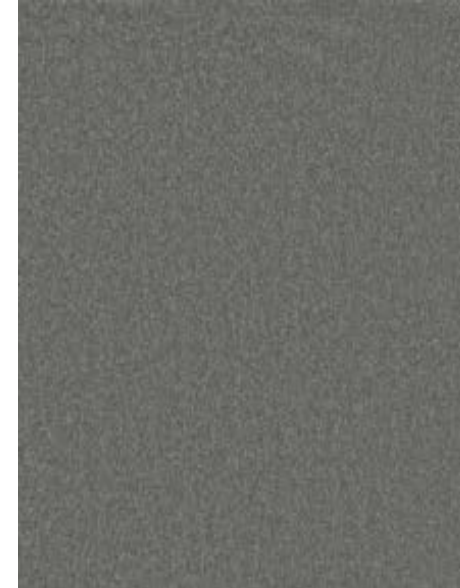


Metal Grey



Gorgeous Red



Desert Sun

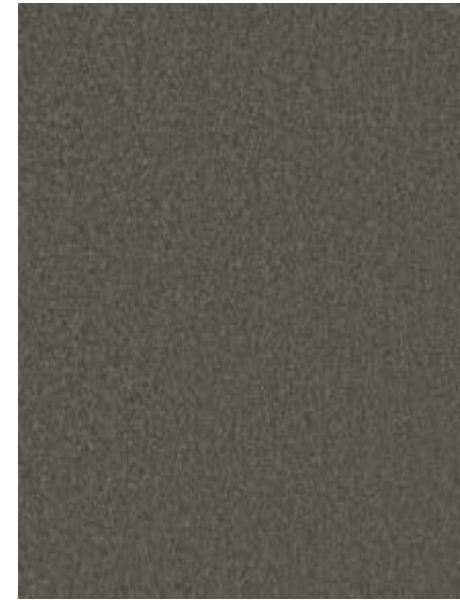

Grey Marsh Wood




Burgundy



Frozen Grape

# Vibrant cut pile carpet tile

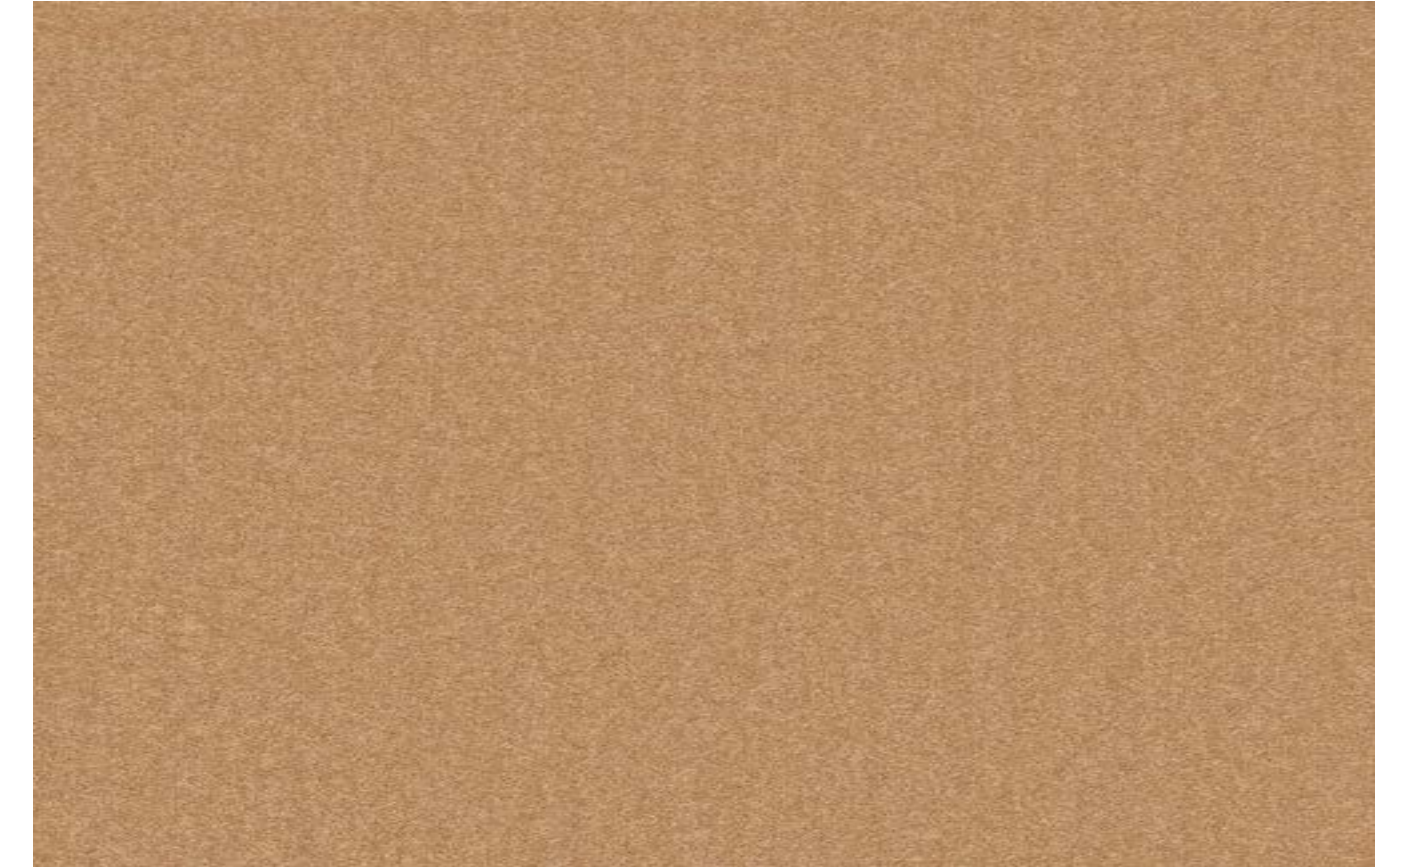

Golden Tan



Bark

# Prism Specification

## COMPOSITION

|                   |         |   |
|-------------------|---------|---|
| Construction      | ISO2424 | Tufted 1/10th Cut Pile                      |
| Pile Fibre        | ISO2076 | Antron 100% PA6.6 Nylon                     |
| Primary Backing   | ISO2424 | Non-woven Polyester                         |
| Secondary Backing | ISO2424 | Bitumen with glass fibre 3kg/m <sup>2</sup> |
| Pile Height       | ISO1766 | 5.0 mm ± 0.5mm                              |
| Total Height      | ISO1765 | 8.0 mm ± 0.5mm                              |
| Pile Weight       | ISO1958 | 1050 gr/m <sup>2</sup> ± 5%                 |
| Total Weight      | ISO8543 | 4650 gr/m <sup>2</sup> ± 10%                |
| Pile Density      | ISO1763 | 181,102 tufts/m <sup>2</sup> ± 5%           |
| Tile Size         | EN994   | 50 x 50 cm                                  |
| Tiles per Box     |         | 20 tiles per box (5m <sup>2</sup> )         |

## CLASSIFICATION

|  |          |   |
|--|----------|---|
| Flammability (Fire Spread EN13501)     | ISO11925 | Fs ≤ 150mm within 20 seconds                              |
| Flammability (Radiant Panel EN13501)   | ISO9239  | Bfl-S1  |
| Flammability (Hot Metal Nut)           | BS4790   | Low radius effects of ignition                            |
| Wear Resistance (Castor Chair Test)    | ISO4918  | Pass ≥ 2.4 (A – Continuous Use)                           |
| Electrical Vertical Resistance         | ISO10965 | Pass ≤ 10 <sup>9</sup> Ω                                  |
| Electrostatic Propensity (Stroll Test) | ISO6356  | Pass <2.0kV   |
| Slip Resistance                        | EN13893  | DS  |
| Dimensional Stability                  | EN986    | Pass <0.2%  |
| Acoustic Impact Noise Reduction        | ISO717   | 28dB  |
| Sound Absorption                       | ISO354   | 500Hz-0.09as, 1000Hz-0.27as, 2000Hz-0.38as, 4000Hz-0.51as |
| Colour Fastness – Light (CIELAB)       | ISO105   | ≥5  |
| Colour Fastness – Rubbing (CIELAB)     | ISO105   | ≥4  |
| Colour Fastness – Water (CIELAB)       | ISO105   | ≥4  |
| Classification for Use                 | ISO10874 | Class 32 Commercial General                               |
| Luxury Class Rating                    | EN1307   | LC3   |


## ENVIRONMENTAL

BREEAM A Rating


## WARRANTY

10 Year Wear Warranty

## CERTIFICATION

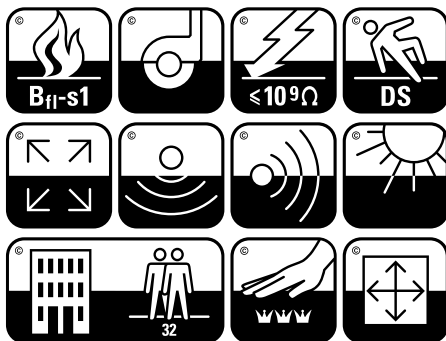

## INSTALLATION



© The Floor Hub. Specifications are subject to normal manufacturing tolerances and may be changed without prior notice. Copies of actual test results are available on request.

The Floor Hub HQ, Unit E Ventura Business Park, Colney Street, AL2 2DB  
Tel: 01923 211151 Email: [sales@thefloorhub.co.uk](mailto:sales@thefloorhub.co.uk)