

# New Dimensions Specification

## COMPOSITION

<b>Construction</b>	ISO2424	Tufted 1/12th Loop Pile
<b>Pile Fibre</b>	ISO2076	100% Solution Dyed Nylon 6.0
<b>Primary Backing</b>	ISO2424	Non-woven Polyester
<b>Secondary Backing</b>	ISO2424	Polymer Modified Bitumen, plus non-woven fleece. 100% recycled calcium carbonate filler, min 75% total backing weight
<b>Pile Height</b>	ISO1766	2.9 mm ± 0.5mm
<b>Total Height</b>	ISO1765	6.0 mm ± 0.5mm
<b>Pile Weight</b>	ISO1958	760 gr/m <sup>2</sup> ± 5%
<b>Total Weight</b>	ISO8543	3800 gr/m <sup>2</sup> ± 10%
<b>Tile Size</b>	EN994	50 x 50 cm
<b>Tiles per Box</b>		20 tiles per box (5m <sup>2</sup> )

## CLASSIFICATION

<b>Wear Resistance (Castor Chair Test)</b>	ISO4918	Pass ≥ 2.4 (A – Continuous Use)
<b>Fire Rating</b>		Falls within the range of BFL
<b>Lightfastness</b>		≥ 6
<b>Antistatic</b>		≤ 2.0 Kv
<b>Classification for Use</b>	ISO10874	Class 33 Commercial Heavy
<b>Luxury Class Rating</b>	EN1307	LC1

## ENVIRONMENTAL

Formaldehyde Emission HCHO - E1

BREEAM A+ Rating


## WARRANTY

10 Year Wear Warranty

## CERTIFICATION



## INSTALLATION

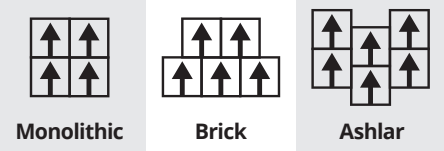

© The Floor Hub. Specifications are subject to normal manufacturing tolerances and may be changed without prior notice. Copies of actual test results are available on request.

Please note that the colours of images displayed may vary, we recommend ordering a sample for verification before placing your order.

The Floor Hub HQ, Unit E Ventura Business Park, Colney Street, AL2 2DB  
Tel: 01923 211151 Email: sales@thefloorhub.co.uk

[www.thefloorhub.co.uk](http://www.thefloorhub.co.uk)