

Transmission 2.0 Specification

COMPOSITION

| | | |
|--------------------------|---------|---|
| Construction | ISO2424 | Tufted 1/12th Loop Pile |
| Pile Fibre | ISO2076 | 100% Solution Dyed Nylon 6.0 |
| Primary Backing | ISO2424 | Non-woven Polyester |
| Secondary Backing | ISO2424 | Polymer Modified Bitumen, plus non-woven fleece. 100% recycled calcium carbonate filler, min 75% total backing weight |
| Pile Height | ISO1766 | 1.7 mm ± 0.5mm |
| Total Height | ISO1765 | 5.0 mm ± 0.5mm |
| Pile Weight | ISO1958 | 650 gr/m ² ± 5% |
| Total Weight | ISO8543 | 4140 gr/m ² ± 10% |
| Tile Size | EN994 | 50 x 50 cm |
| Tiles per Box | | 20 tiles per box (5m ²) |

CLASSIFICATION

| | | |
|--|----------|---------------------------------|
| Wear Resistance (Castor Chair Test) | ISO4918 | Pass ≥ 2.4 (A – Continuous Use) |
| Fire Rating | | Falls within the range of BFL |
| Lightfastness | | ≥6 |
| Antistatic | | ≤ 2.0 Kv |
| Classification for Use | ISO10874 | Class 33 Commercial Heavy |
| Luxury Class Rating | EN1307 | LC1 |

ENVIRONMENTAL

Formaldehyde Emission HCHO - E1

BREEAM A+ Rating


WARRANTY

10 Year Wear Warranty

CERTIFICATION



INSTALLATION

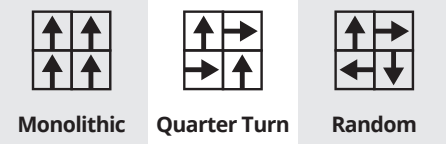

© The Floor Hub. Specifications are subject to normal manufacturing tolerances and may be changed without prior notice. Copies of actual test results are available on request.

Please note that the colours of images displayed may vary, we recommend ordering a sample for verification before placing your order.

The Floor Hub HQ, Unit E Ventura Business Park, Colney Street, AL2 2DB
Tel: 01923 211151 Email: sales@thefloorhub.co.uk

www.thefloorhub.co.uk